

107522841

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

Rec'd PCT/PTO 28 JAN 2005

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
4 March 2004 (04.03.2004)

PCT

(10) International Publication Number
WO 2004/018232 A1

(51) International Patent Classification⁷: B60B 33/06

(21) International Application Number:
PCT/NO2003/000249

(22) International Filing Date: 17 July 2003 (17.07.2003)

(25) Filing Language: Norwegian

(26) Publication Language: English

(30) Priority Data:
60/399,137 30 July 2002 (30.07.2002) US
20023796 9 August 2002 (09.08.2002) NO

(71) Applicant and

(72) Inventor: LIBAKKEN, Rolf [NO/NO]; P.O. Box 413,
N-9991 Båtsfjord (NO).

(74) Agents: ONSAGERS AS et al.; P.O. Box 6963 St. Olavs
plass, N-0130 Oslo (NO).

(81) Designated States (national): AE, AG, AL, AM, AT (util-
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,
RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,
ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guid-
ance Notes on Codes and Abbreviations" appearing at the begin-
ning of each regular issue of the PCT Gazette.

(54) Title: ROLLER/FOOT DEVICE CASTOR

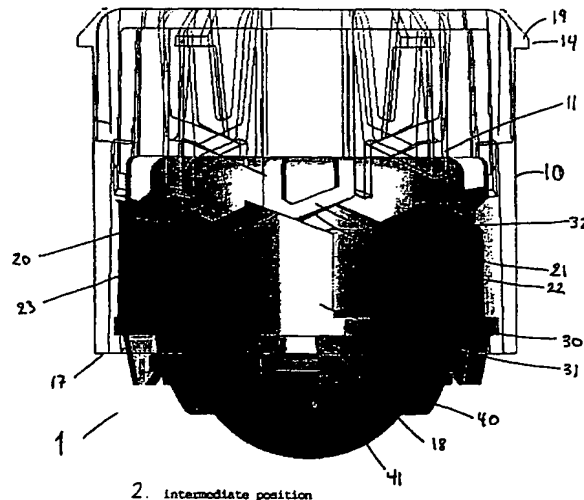

(57) Abstract: A roller/foot device (1) comprising a cylindrical outer sleeve (10), a guide sleeve (20) arranged inside the outer sleeve (10), a locking sleeve (30) arranged inside the outer sleeve (10), a spring device where one end abuts against the outer sleeve's closed end (13) and the other end abuts against one end portion of the guide sleeve or the locking sleeve and a roller element (41) which is rotatably mounted abutting against the locking sleeve's (20) end portion which is located at the extreme end of the outer sleeve (10). The sleeves comprise ribs which can slide towards each other and cause the roller element (41) to assume different positions in the longitudinal direction of the outer sleeve (10) when the device (1) is subjected to forces. The device (1) can thereby be employed as a roller device with the roller element (41) in an outer position and as a foot device with the roller element (41) in an inner position.

WO 2004/018232 A1